




Kwikflex® NMLT FLEXIBLE ELECTRICAL TUBING

FEATURES & BENEFITS

- 1/4" thru 2" trade size
- Use with Kwikflex® straight or right angle connectors
- Resists corrosion, oil, & water
- Maximum flexibility, can be used in extremely tight quarters
- Resists abuse, pull & crushing
- Smooth inside for easier wire pulling
- Light weight, lower installed cost
- Outdoor, sunlight resistant
- Quick installation, cuts with utility knife or PVC cutter
- Integral rigid & flexible PVC construction
- Suitable for use in high vibration or flexing applications
- Ideal for fiber optic cable protection

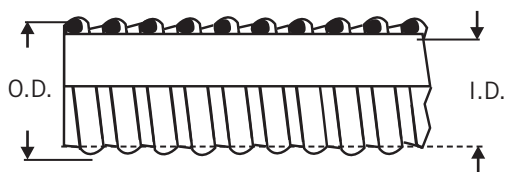

APPLICATIONS

- Automotive equipment
- Computer & peripherals
- Fiber optics
- Lab equipment
- Lasers
- Office equipment
- Processing control and monitoring equipment
- Robotics
- White goods systems



SPECIFICATIONS

Product Code	Trade Size	Std. Pkg.	Weight / Pkg.	Part Dimensions (inches)	
				O.D. Min.-Max.	I.D. Min.-Max
165055	3/8"	100	9	.690 - .710	.484 - .504
165057	1/2"	100	10	.820 - .840	.622 - .642
165059	3/4"	100	14	1.030 - 1.050	.820 - .840
165061	1"	100	19	1.290 - 1.315	1.041 - 1.066
165064	1-1/4"	100	22	1.630 - 1.660	1.380 - 1.410
165067	1-1/2"	50	14	1.865 - 1.900	1.575 - 1.600
165070	2"	50	21	2.340 - 2.375	2.020 - 2.045

Standard Color Black